

REF. NO: MPCL 93 CAT. P61

REVISION

C.O.N	SYM	DESCRIPTION	DATE	DRAWN	APPR'D
	A	(1)8±1 WAS 8. (2)"--@1,000 Vdc" WAS "-- @500 Vdc."	9/23/96	T.TSUGAWA	

GENERAL:

MODEL CP-2FB(x) IS 22.3mm (7/8") O.D., 3.175mm (1/8") DIA. SHAFT, BUSHING MOUNT, CONDUCTIVE PLASTIC POTENTIOMETER. ITS CO-MOLDED ELEMENT AND PRECISION CONSTRUCTION PERMIT THE UNIT TO FEATURE LOW TORQUE, SUPERB SMOOTHNESS AND LONG LIFE. ITS SHAFT BEARING IS AVAILABLE IN EITHER BALL BEARING OR METAL SLEEVE BEARING.

ELECTRICAL SPECIFICATIONS:

ELECTRICAL ANGLE: 340°
TOTAL RESISTANCE: 0.5, 1, 2, 5, 10K OHMS
TOTAL RESISTANCE TOLERANCE: ±20%
LINEARITY (INDEPENDENT): ±1% (±0.5% AVAILABLE)
REPEATABILITY:
 MODEL CP-2FB(b): ±0.005%
 MODEL CP-2FB(m): ±0.05%
POWER RATING: 1 WATT @70°C
INSULATION RESISTANCE: 100 megOHMS MIN. @ 1,000 Vdc [Ⓐ]
DIELECTRIC STRENGTH: 1,000 Vrms @50/60 Hz, for 1 MINUTE

MECHANICAL SPECIFICATIONS:

MECHANICAL ANGLE: 360°
SHAFT BEARING:
 MODEL CP-2FB(b): BALL BEARING
 MODEL CP-2FB(m): METAL SLEEVE BEARING
TORQUE:
 MODEL CP-2FB(b): 5 g-cm (0.069 in-oz) MAX.
 MODEL CP-2FB(m): 20 g-cm (0.278 in-oz) MAX.
WEIGHT: APPROX. 60 g (2.1 oz)
LIFE: 10 MILLION CYCLES MIN.

ENVIRONMENTAL SPECIFICATIONS:

OPERATING TEMPERATURE: -40°C to 120°C
VIBRATIONS: 15 Gs, 2,000 Hz
SHOCK: 50Gs, 11 ms

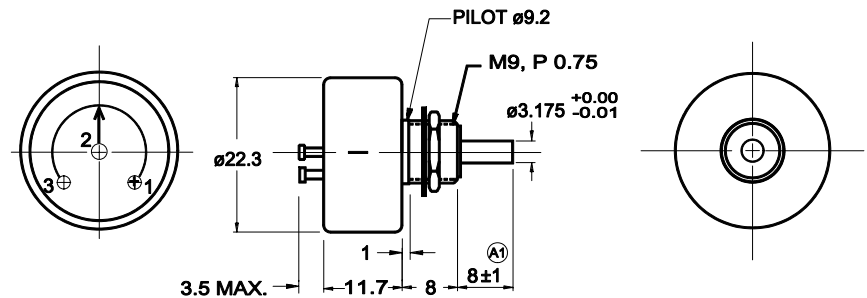


FIGURE 1 OUTLINE DIMENSIONS




FIGURE 2 SCHEMATIC



GUEMISA

Sta. Virgilia 3-b ; 1ºF 28033 Madrid
 Tfno.: 91 764 21 00 Fax.: 91 764 21 32
 Email: info@guemisa.com

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN mm(in).
 TOLERANCES:
 ANGLES ±1.5°
 <10 mm: ±0.25
 <100 mm: ±0.5
 >100 mm: ±1

DRAWN	T.TSUGAWA	DATE	7/18/94
CHECKED		DATE	
APPROVED		DATE	
APPROVED		DATE	

SCALE:

SPECIFICATION DWG
 FOR
MODEL CP-2FB(x)
POTENTIOMETER

FILE: CP-2FB

Midori America Corporation
 FULLERTON, CA

A-MAC-B47

A

1 OF 1